


ECOSOFT P'URE BALANCE REVERSE OSMOSIS FILTER

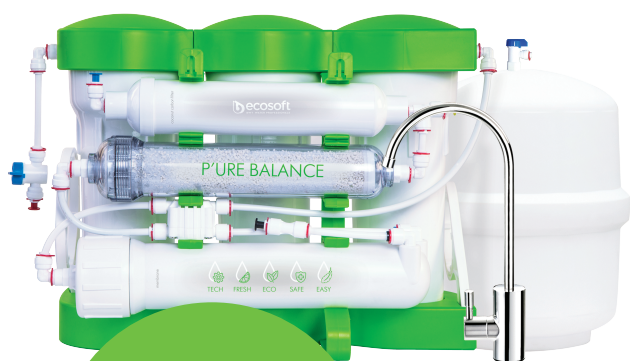

**MAGNESIUM
& CALCIUM
ENRICHED**

FILTRATION TECHNOLOGY:

- 5 micron PP sediment filter
- GAC coconut shell carbon filter
- AquaGreen filter
- 75 GPD RO membrane element
- AquaSpring mineralization filter
- Coconut shell carbon post-filter

SPECIFICATION:

Code	Flow capacity, LPD (GPD)	Inlet pressure, bar (psi)	Connections	Total volume of storage tank, L (gal)	Dimensions, H x W x D, mm (in)
MO675MPUREBALECO	280 (75)	3–6 (43.5–87)	1/2"	12 (3.2)	310 x 440 x 195 (12.2 x 17.3 x 7.7)

COMPONENTS:

- Filter housing
- Pre-filters for P'URE Balance filter
- Membrane element 75 GPD (280 LPD)
- Ecosoft carbon post-filter for reverse osmosis filter
- AquaSpring mineralization filter
- 'Modern' ball valve faucet for purified water
- Plastic pressure tank (total vol. 12 L/3.2 gal, usable vol. up to 7 L/1.8 gal) and tank valve
- Feed water adapter, feed valve, drain saddle
- Pack of color tubes (4 pcs.) for convenient filter installation
- Service wrenches
- User manual

Unit weight (net/gross), kg: 10.00/11.04

lb: 22.0/24.3

Box dimensions, m: 0.49 x 0.49 x 0.35

in: 19.2 x 19.2 x 13.8

ECOSOFT P'URE BALANCE REVERSE OSMOSIS FILTER

Code	Product	Pieces in box	Boxes on pallet	Pieces on pallet
MO675MPUREBALECO	Ecosoft P'URE Balance reverse osmosis filter	1	26	26

Minimum order is 1 pallet of any product

KEY FEATURES:

1. The optimal and constant amount of natural calcium and magnesium minerals in water is 60-80 mg/L
2. **Recovery rate 50%** — AquaGreen technology conserves up to 20 000 litres of water per year
3. Possibility of horizontal and vertical installation
4. System tightness guarantee from the moment of leaving the factory to the moment of installation
5. E-commerce packaging



WATER AFTER FILTER*:

Parameter	Value
Total mineral content, mg/L	60 - 80
Magnesium, mg/L	4 - 6
Calcium, mg/L	10 - 15
pH	7 - 8,5

* The indicators are determined under the following conditions: inlet water temperature is 20 °C, outlet water composition and filter operation parameters correspond to the recommended by the manufacturer, water consumption intensity is appropriate for a family of three. When the inlet water temperature decreases in winter, the mineral content in the treated water may be lower, and when the temperature increases in summer, it may be higher.

